

Accuracy class: II

## Top Quality!!! GS Series Electronic Balance

With 14 units conversion

With counting function, tare within full capacity, calibration

AC/DC power available, dry batteries, Adaptor.

LCD display with white backlight

Accessory: Manual, Adaptor



Standard output interface (optional)

With wired/wireless extra display (optional)

With rechargeable battery inside (optional)

bottom weighing function (optional)

case-pack: 2 pcs / ctn

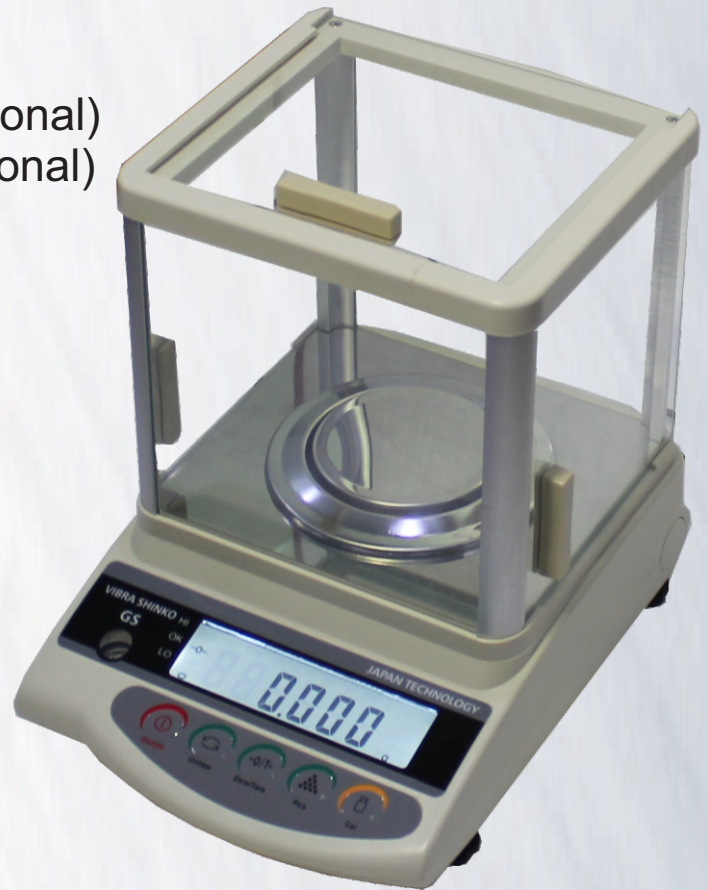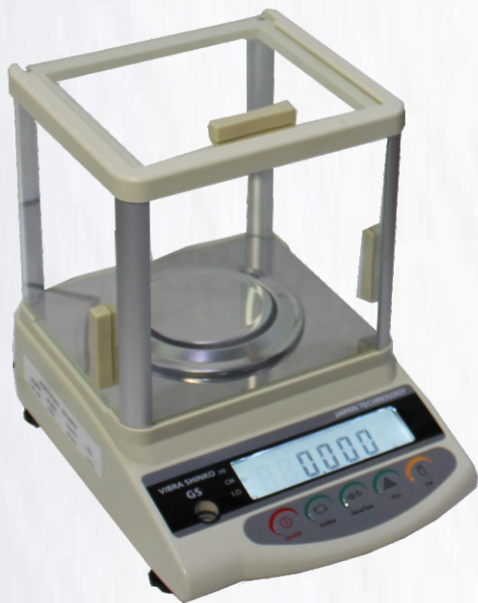

MODEL	GS2203A	GS2203A
Capacity	220 g	320 g
Division	0.001 g	0.001 g
Verification scales interval	0.01 g	0.01 g
Display	LCD	
Dimensions (LxDxH)	(230 x 190 x 240) mm	
Weighing pan (mm)	Ø 80 mm	
Weiging Unit	kg, g, lb, oz, tlt PCS	
Power Supply	100-240V AC Adapter 9VDC 200mA	
Net weight	4.5 kg / 5.2 kg	

Accuracy class: II

## Top Quality!!! GS Series Electronic Balance

With 14 units conversion

With counting function, tare within full capacity, calibration

AC/DC power available, dry batteries, Adaptor.

LCD display with white backlight

Accessory: Manual, Adaptor

Standard output interface (optional)

With wired/wireless extra display (optional)

With rechargeable battery inside (optional)

bottom weighing function (optional)

case-pack: 8 pcs/ctn



MODEL	GS322N	GS622N0	GS1202N
Capacity	320 g	620 g	1200 g
Division	0.01 g	0.01 g	0.01 g
Verification scales interval	0.1 g	0.1 g	0.1 g
Display	LCD		
Dimensions (LxDxH)	(260 x 190 x 95) mm		
Weighing pan (mm)	Ø 128 mm		
Weiging Unit	kg, g, lb, oz, tlt PCS		
Power Supply	100-240V AC Adapter 9VDC 200mA		
Net weight	2,5 kg/ 2.8 kg		

Accuracy class: II

## Top Quality!!! GS Series Electronic Balance

With 14 units conversion

With counting function, tare within full capacity, calibration  
AC/DC power available, dry batteries, Adaptor.

LCD display with white backlight

Accessory: Manual, Adaptor

Standard output interface (optional)

With wired/wireless extra display (optional)

With rechargeable battery inside (optional)

bottom weighing function (optional)

case-pack: 8 pcs/ctn



MODEL	GS2202N	GS3202N	GS3201N	GS6201N
Capacity	2200 g	3200 g	3200 g	6200 g
Division	0.01 g	0.01 g	0.1 g	0.1 g
Verification scales interval	0.1 g	0.1 g	1 g	1 g
Display	LCD			
Dimensions (LxDxH)	(260 x 190 x 95) mm			
Weighing pan (mm)	(153 x 173) mm			
Weiging Unit	kg, g, lb, oz, tlt PCS			
Power Supply	100-240V AC Adapter 9VDC 200mA			
Net weight	2,5 kg/ 2.8 kg			