

**SUPER-SS<sup>®</sup> D2 全不锈钢防水秤**  
**SUPER-SS D2 Full stainless steel waterproof scale**



**规格表**  
**SPECIFICATION**

最大量程 /Max.Capacity	3kg	6kg	15kg	30kg
分度值 /Test division	1/0.5/0.2/0.1g	2/1/0.5/0.2g	5/2/1/0.5g	5/2/1/0.5g
传感器 (Load cell)	4通道数字智能称重传感器 110x30x22mm (Four channels digital intelligent weighing load cell 110x24x22mm)			
防水防潮等级 (Waterproof and dustproof grade)	IP68			
外观尺寸 (Overall dimension)	329 × 287 × 112 mm			
秤盘尺寸 (Plate size)	200 × 260 mm			
LED 8 字高度 (LED height of word 8)	22.9mm			
LCD 8 字高度 (LCD height of word 8)	26.5mm			
电池 (Battery)	5V/4000mAH 锂电 (Lithium battery)			
适配器 (Transformer)	5V/2A 电子式 (Electronic) 100~240V/50~60Hz			
232 接口 (232 Interface)	可选 (Optional)			

**SUPER-SS® 家族**  
SUPER-SS FAMILY



SUPER-SS®

SUPER-SS®系列不锈钢防水秤是我公司首创产品，防水防尘IP68，它以结构简单、性价比高而风靡全球，十年来累计产量超过30万台，给广大客户带来巨大经济效益。

SUPER-SS® series stainless steel waterproof scales are the top products of world, only made in our factory, they are waterproof and dustproof, IP68, they are famous for their simple structure and cost-effective.

We produced more than 300,000 units in the past 10 years, bring great benefits to our clients.



SUPER-SS® NEW 5



SUPER-SS® NEW 5 传感器组件  
SUPER-SS® NEW 5 Load cell parts

传感器防护更加有效，提高了整秤的精度，并在结构上进行了优化。

Protection of load cell are more effective, the accuracy of whole scale is improved, the structure is optimized.



SUPER-6



SUPER-6 传感器组件  
SUPER-6 Load cell parts

在SUPER-SS®基础上加强了传感器防水防尘功能，适用于更恶劣的环境。

Based on SUPER-SS®, we strengthened its waterproof and dustproof, applicable to worse conditions.

**规格表**  
SPECIFICATION

最大量程 /Max.Capacity	1.5kg	3kg	6/7.5kg	15kg	30kg
检定分度值 e/Test division	0.5g	1g	2g	5g	10g
显示分度值 d1/Display division	0.2g	0.5g	1g	2g	5g
显示分度值 d2/Display division	0.1g	0.2g	0.5g	1g	2g
秤盘尺寸 /Plate size division	19 × 23 cm				

**SUPER-SS® D1 全不锈钢防水秤**  
SUPER-SS D1 Full stainless steel waterproof scale



获得多项国家专利  
GET MANY NATIONAL PATENTS



bottom picture

**规格表**  
SPECIFICATION

最大量程 /Max.Capacity	300g	600g	1500g	3000g	6000g
分度值 /Test division	0.1/0.05/0.02/0.01g	0.2/0.1/0.05/0.02g	0.5/0.2/0.1/0.05g	0.5/0.2/0.1/0.05g	2/1/0.5/0.2g

传感器 ( Load cell )	4通道数字智能称重传感器 110x24x22mm ( Four channels digital intelligent weighing load cell 110x24x22mm )
防水防潮等级 ( Waterproof and dustproof grade )	IP68
外观尺寸 ( Overall dimension )	266 × 251 × 100 mm
秤盘尺寸 ( Plate size )	178 × 223 mm
LED 8 字高度 ( LED height of word 8 )	15mm
LCD 8 字高度 ( LCD height of word 8 )	19.3mm
电池 ( Battery )	5V/4000mAH 锂电 ( Lithium battery )
适配器 ( Transformer )	5V/2A 电子式 ( Electronic ) 100~240V/50~60Hz
232 接口 ( 232 Interface )	可选 ( Optional )

## TCS-JJ 塑包钢台秤

TCS-JJ Plastic covered steel platform scale



TCS-JJ 塑包钢台秤组合

TCS-JJ Plastic covered steel platform scale



XK 3101\_LED



XK 3101D\_LCD



秤体材料验证—独特的塑包制材料  
Cross section of platform material  
Original plastic covered steel material



首创的管状组件，获得国家专利  
Load cell part originated with us, National patent

### 3040规格表 SPECIFICATION

最大量程/Max. Capacity	30kg	60kg	100kg	150kg
称量分度值/Load division	10g	20g	50g	50g
显示分度值d1/Display division	5g	10g	20g	20g
显示分度值d2/Display division	2g	5g	5g	10g
秤盘尺寸/Plate size	30 × 40 cm			


### 4060规格表 SPECIFICATION

最大量程/Max. Capacity	30kg	60kg	100kg	150kg	300kg
称量分度值/Load division	10g	20g	50g	50g	100g
显示分度值d1/Display division	5g	10g	20g	20g	20g
显示分度值d2/Display division	2g	5g	10g	10g	20g
秤盘尺寸/Plate size	40 × 60 cm				



JJ-LC型传感器由我公司自主研发，为铝合金双孔平行梁结构，采用特殊的密封和表面防护材料，具有良好的防潮和防腐性能，适用于雨水、防腐要求的电子秤及各类电子称重设备。  
JJ-LC load cell developed independently by our company, it is Aluminum, bilinear, parallel beam structure. We use special seal and surface protection material, it has good moisture-proof and corrosion-proof property, applicable to waterproof, corrosion-proof scales and other electronic weighing equipment.

技术指标 Main technical data				
额定载荷 Rated load	kg	0.6m(200kg)~10m(5000kg)		
精度等级 Accuracy class		COO	CO	COG
最大检定分度数 Maximum number of load cell verification intervals	max	2500	3000	4000
最小检定分度数 Minimum load cell verification intervals	Min	Emax/5000	Emax/1000	Emax/11000
综合误差 Combined error	%FS	≤ +0.03	≤ +0.02	≤ +0.015
蠕变 Creep	%FS/30min	≤ +0.02	≤ +0.016	≤ +0.012
温度对输出灵敏度的影响 Temp. effed on sensitivity	%FS/10°C	≤ +0.02	≤ +0.0175	≤ +0.013
温度对零位输出的影响 Temp. effed on zero output	%FS/10°C	≤ +0.028	≤ +0.02	≤ +0.0127
输出灵敏度 Sensitivity	mV/V	2.0 ± 0.2		
输入阻抗 Input resistance	Ω	456 ± 6		
输出阻抗 Output resistance	Ω	350 ± 5		
绝缘电阻 Insulation resistance	MΩ	≥ 5000 (50VDC)		
零点输出 Zero output	%FS	≤ ± 2		
温度补偿范围 Compensated temperature range	°C	-10~40		
允许使用温度范围 Operating temperature range	°C	-25~55		
推荐激励电压 Recommended excitation voltage	V	5~12 (DC)		
最大激励电压 Maximum excitation voltage	V	18 (DC)		
安全过载范围 Safe over load	%FS	150		
过载恢复范围 Ultrastate over load	%FS	300		
四角误差 Four corner error		0.02% of rated load value		
最大台面尺寸 Maximum table size	mm	250 × 250		
接线方式 Method of connecting wire		输A/Output (+), 红/Red	输B/Output (-), 黑/Black	输C/Output (-), 绿/Green

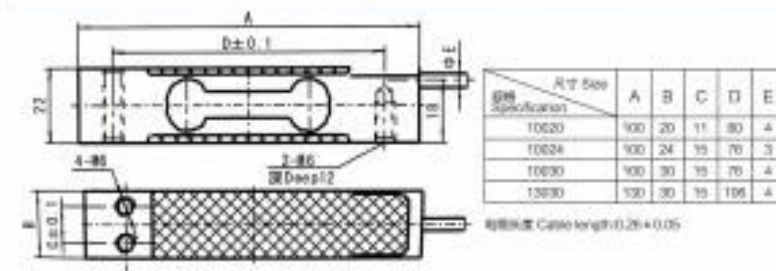



**SUPER-SS® D2 全不锈钢防水秤**  
SUPER-SS D2 Full stainless steel waterproof scale



**规格表**  
SPECIFICATION


最大量程 /Max.Capacity	3kg	6kg	15kg	30kg
分度值 /Test division	1/0.5/0.2/0.1g	2/1/0.5/0.2g	5/2/1/0.5g	5/2/1/0.5g

传感器 (Load cell)	4通道数字智能称重传感器 110x30x22mm (Four channels digital intelligent weighing load cell 110x24x22mm)
防水防潮等级 (Waterproof and dustproof grade)	IP68
外观尺寸 (Overall dimension)	329 × 287 × 112 mm
秤盘尺寸 (Plate size)	200 × 260 mm
LED 8 字高度 (LED height of word 8)	22.9mm
LCD 8 字高度 (LCD height of word 8)	26.5mm
电池 (Battery)	5V/4000mAH 锂电 (Lithium battery)
适配器 (Transformer)	5V/2A 电子式 (Electronic) 100~240V/50~60Hz
232 接口 (232 Interface)	可选 (Optional)

**TCS-SS全不锈钢防水台秤系列**  
TCS-SS Series Full Stainless steel waterproof platform scale



不锈钢仪表  
Stainless steel housing indicator

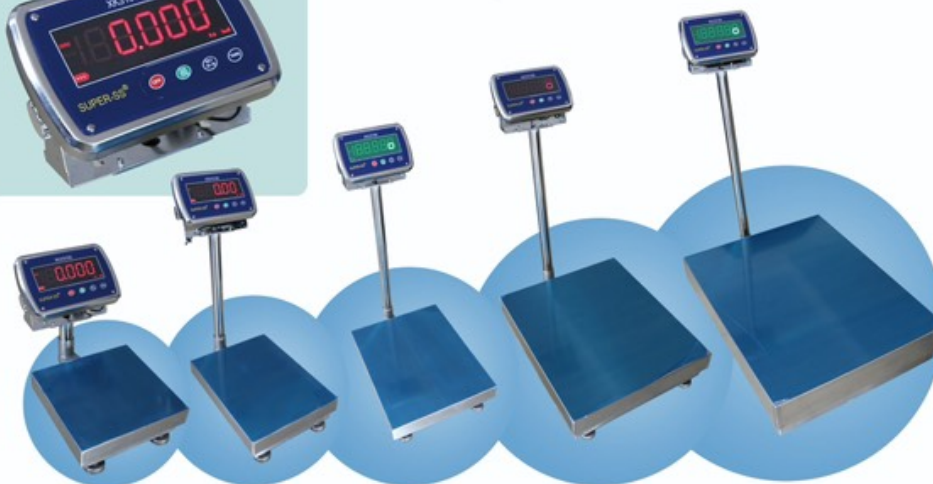

**规格表**  
SPECIFICATION

秤盘尺寸 (Plate size)	2828cm	3040cm	4050cm	5060cm	6080cm
最大量程 (Max.capacity)	15/30/60kg	30/60/150kg	60/150/300kg	150/300/600kg	150/300/600kg
精度 (Accuracy)	3000~30000				
传感器尺寸 (Load cell size)	150 × 35 × 40mm	150 × 44 × 40mm	150 × 60 × 62mm	150 × 60 × 62mm	150 × 90 × 74mm
4通道数字智能称重传感器 (Four channels digital intelligent weighing load cell)					

防水防潮等级 (Waterproof and dustproof grade)	IP68
外观尺寸 (Overall dimension)	254 × 86 × 170 mm 不带U型支架 (Without u-shaped support)
LED 8 字高度 (LED height of word 8)	36mm
LCD 8 字高度 (LCD height of word 8)	43mm
电池 (Battery)	5V/4000mAH 锂电 (Lithium battery)
适配器 (Transformer)	5V/2A 电子式 (Electronic) 100~240V/50~60Hz
232 接口 (232 Interface)	可选 (Optional)